


INSTALLATION INSTRUCTIONS

Valve and Hand Shower (cold only)

出水開關&手持花灑安裝說明(冷水專用)

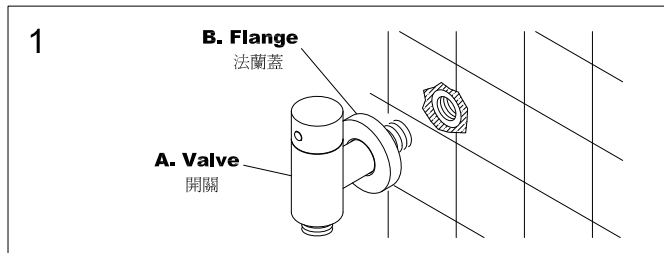


CAUTION : Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

- a./ Turn the Valve on and run for 1 minute before connect shower hose to Valve.
安裝花灑軟管之前，必需先把開關全開排水一分鐘。

1. Apply pipe compound or thread sealant tape to the 1/2" end, then screw **Valve** with **Flange** into wall water-outlet as Fig.1 shown.
將龍頭1/2"牙塗上管牙膠或包覆止洩帶，再連同法蘭蓋一起鎖入牆壁出水口，如 Fig.1 所示。

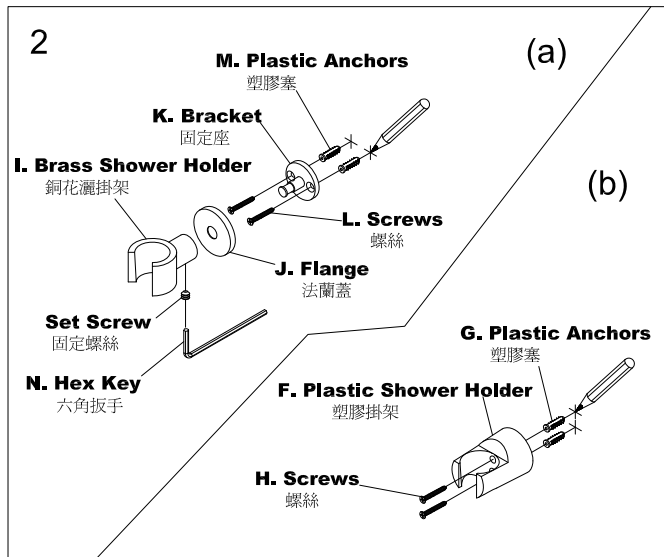

2. Install Shower Holder
安裝掛架

- a./ Brass Shower Holder

Using **Bracket** as a template, mark and drill at proper position.

When mounting on drywall, use 6mm drilling bit to drill holes in marked position, and insert **Plastic Anchors**, then install bracket and Brass Shower Holder as fig.2(a) shown.

先決定銅花灑掛架欲安裝之位置，利用固定座上兩孔用鉛筆畫兩個基準點，再使用6mm鑽頭於牆上記號鑽孔。嵌入塑膠塞並使之齊平於牆面，將固定座以螺絲鎖緊在牆上。用隨附六角扳手先鬆開花灑掛架下方的固定螺絲，使花灑掛架能順利套進固定座後，再鎖緊下方的固定螺絲。如 Fig.2(b)所示。

- b./ Plastic Shower Holder


Using **Shower Holder** as a template, mark and drill at proper position.

When mounting on drywall, use 6mm drilling bit to drill holes in marked position, and insert **Plastic Anchors**, then install Brass Shower Holder as fig.2(b) shown.

先決定塑膠掛架欲安裝之位置，利用塑膠掛架上兩孔用鉛筆畫兩個基準點，再使用6mm鑽頭於牆上記號鑽孔。嵌入塑膠塞並使之齊平於牆面，將塑膠掛架以螺絲鎖緊在牆上。

3. Connect **Shower Hose** with **Gasket** to **Valve** and **Hand Shower** as Fig.3 shown.

將蛇管含墊片固定在開關與手持花灑。如 Fig.3 所示。

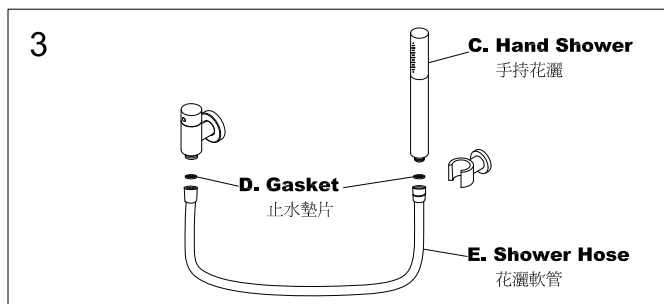

FIXING CONTENTS

組配件內容

